



ELECTRONICS CO. LTD.
EMERGENCY VEHICLE SOUND, LIGHTING & EQUIPMENT

MR6TL-EXPLORER

Ford Interceptor Explorer Rear Visor Hatch Light





Step 1

Open Hatch

Step 2

Remove upper panel

Step 3

Remove plastic 5 plastic covered nuts.





Step 4

Disconnect third brake light plug



Step 5

Tap visor upwards to release plastic clips



Step 6

Disconnect washer hose



Step 7

Gently resting visor. Position rear lights under spoiler, staying clear of rear washer nozzle


Step 8


Support rear light with tape once you have proper positioning



Step 9

Pre-drill mounting holes and secure lights to rear hatch with hardware

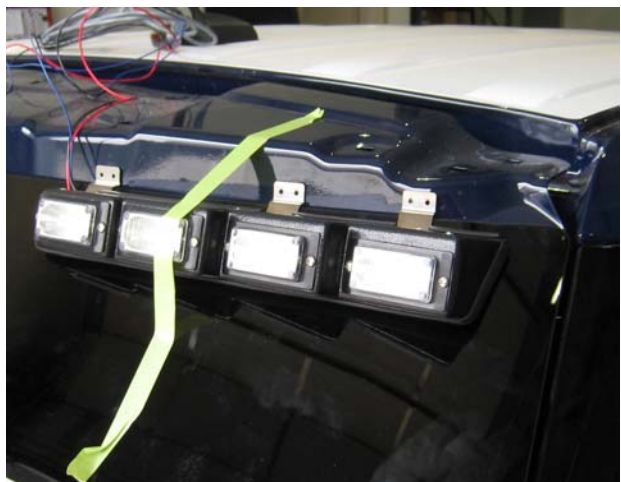

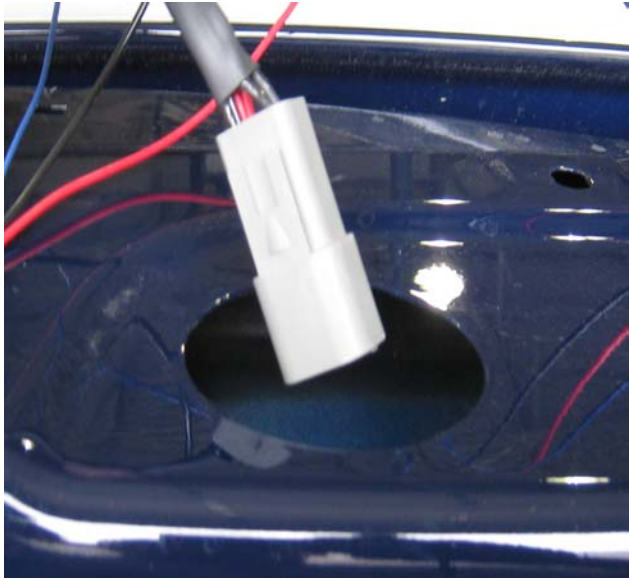

Step 10

Route connector through top opening of hatch




Step 11

Route connector through bottom of hatch opening



Step 12

Secure wires with tape

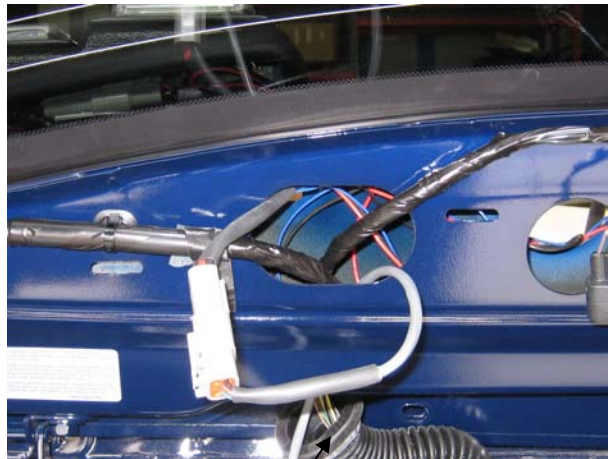

Step 13

Plug in connector and route extension cable through factory hatch grommet.

Step 14

Route harness from top or rear headliner to driver or passenger side



Step 15

Install washer hose, third brake light connector and install visor and mounting nuts.

